


DIN 7993 A 型

軸用サークリップ RW型

53

ungespannt · libre · not stressed

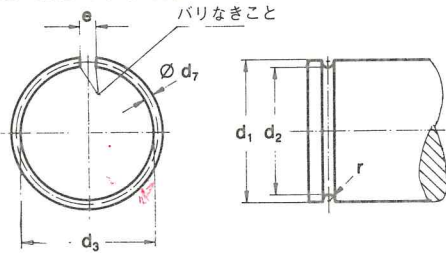

表示例：RW 25 (d₁=25mmのゼーガー鋼線サークリップ DIN 7993)

呼び径	リ ン グ					溝			N _{abl.} (U/Min.)
	d ₁	d ₇ **	d ₃	公差	e ≈	重量 (kg/1000)	d ₂	公差	
4	0.8	3.1	-0.2	1	0.044	3.2	±0.05	0.5	175000
5	0.8	4.1	-0.2	1	0.057	4.2	±0.05	0.5	112000
6	0.8	5.1	-0.2	1	0.069	5.2	±0.05	0.5	77000
7	0.8	6.1	-0.3	2	0.077	6.2	±0.05	0.5	57000
8	0.8	7.1	-0.3	2	0.090	7.2	±0.05	0.5	44000
10	0.8	9.1	-0.3	2	0.115	9.2	±0.05	0.5	28000
12	1.0	10.8	-0.4	3	0.210	11.0	±0.05	0.6	24000
14	1.0	12.8	-0.4	3	0.250	13.0	±0.05	0.6	17800
16	1.6	14.2	-0.4	3	0.740	14.4	±0.05	0.9	22000
18	1.6	16.2	-0.4	3	0.830	16.4	±0.05	0.9	17300
20	2.0	17.7	-0.5	3	1.45	18.0	±0.10	1.1	17500
22	2.0	19.7	-0.5	3	1.60	20.0	±0.10	1.1	14500
24	2.0	21.7	-0.5	3	1.78	22.0	±0.10	1.1	12200
25	2.0	22.7	-0.5	3	1.84	23.0	±0.10	1.1	11000
26	2.0	23.7	-0.5	3	1.91	24.0	±0.10	1.1	10300
28	2.0	25.7	-0.5	3	2.07	26.0	±0.10	1.1	8900
30	2.0	27.7	-0.5	3	2.22	28.0	±0.10	1.1	7800
32	2.5	29.1	-0.6	4	3.67	29.5	±0.10	1.4	8500
35	2.5	32.1	-0.6	4	3.98	32.5	±0.10	1.4	7200
38	2.5	35.1	-0.6	4	4.40	35.5	±0.10	1.4	6100
40	2.5	37.1	-0.6	4	4.64	37.5	±0.10	1.4	5500
42	2.5	39.0	-0.8	4	4.87	39.5	±0.10	1.4	5000
45	2.5	42.0	-0.8	4	5.23	42.5	±0.10	1.4	4300
48	2.5	45.0	-0.8	4	5.60	45.5	±0.10	1.4	3800
50	2.5	47.0	-0.8	4	5.83	47.5	±0.10	1.4	3500
55	3.2	51.1	-0.8	4	10.51	51.8	±0.15	1.8	3700
60	3.2	56.1	-0.8	4	11.50	56.8	±0.15	1.8	3100
65	3.2	61.1	-0.8	4	12.49	61.8	±0.15	1.8	2650
70	3.2	66.0	-1.0	5	13.40	66.8	±0.15	1.8	2300
75	3.2	71.0	-1.0	5	14.39	71.8	±0.15	1.8	2000
80	3.2	76.0	-1.0	5	15.38	76.8	±0.15	1.8	1750
85	3.2	81.0	-1.0	5	16.38	81.8	±0.15	1.8	1550
90	3.2	86.0	-1.0	5	17.37	86.8	±0.15	1.8	1380
95	3.2	91.0	-1.0	5	18.36	91.8	±0.15	1.8	1240
100	3.2	95.8	-1.2	5	19.31	96.8	±0.15	1.8	1120
105	3.2	100.8	-1.2	5	20.30	101.8	±0.15	1.8	1030
110	3.2	105.8	-1.2	5	21.29	106.8	±0.15	1.8	930
115	3.2	110.8	-1.2	5	22.29	111.8	±0.15	1.8	850
120	3.2	115.8	-1.2	5	23.28	116.8	±0.15	1.8	780
125	3.2	120.8	-1.2	5	24.27	121.8	±0.15	1.8	720

材質：DIN 17223の特殊バネ鋼線

d₇=1.0mm以下 C 級

d₇=1.6mm以下 B 級


・印の製品をご検討の際は、お問合わせ下さい。

DIN 7993 B 型

穴用サークリップ RB型

54

ungespannt · libre · not stressed

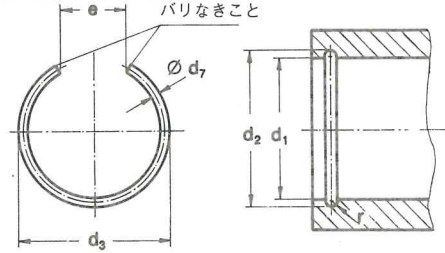

表示例：RB 25 (d₁=25mmのゼーガー鋼線サークリップ DIN 7993)

呼び径	リ ン グ					溝			
	d ₁	d ₇ **	d ₃	公差	e ≈	重量 (kg/1000)	d ₂	公差	r
7	0.8	7.9	+0.3	4	0.071	7.8	±0.05	0.5	
8	0.8	8.9	+0.3	4	0.083	8.8	±0.05	0.5	
10	0.8	10.9	+0.3	4	0.108	10.8	±0.05	0.5	
12	1.0	13.2	+0.4	6	0.196	13.0	±0.05	0.6	
14	1.0	15.2	+0.4	6	0.234	15.0	±0.05	0.6	
16	1.6	17.8	+0.4	8	0.706	17.6	±0.05	0.9	
18	1.6	19.8	+0.4	8	0.804	19.6	±0.05	0.9	
20	2.0	22.3	+0.5	10	1.32	22.0	±0.10	1.1	
22	2.0	24.3	+0.5	10	1.47	24.0	±0.10	1.1	
24	2.0	26.3	+0.5	10	1.63	26.0	±0.10	1.1	
25	2.0	27.3	+0.5	10	1.70	27.0	±0.10	1.1	
26	2.0	28.3	+0.5	10	1.79	28.0	±0.10	1.1	
28	2.0	30.3	+0.5	10	1.94	30.0	±0.10	1.1	
30	2.0	32.3	+0.5	10	2.10	32.0	±0.10	1.1	
32	2.5	34.9	+0.6	12	3.47	34.5	±0.10	1.4	
35	2.5	37.9	+0.6	12	3.85	37.5	±0.10	1.4	
38	2.5	40.9	+0.6	12	4.20	40.5	±0.10	1.4	
40	2.5	42.9	+0.6	12	4.43	42.5	±0.10	1.4	
42	2.5	45.0	+0.8	16	4.54	44.5	±0.10	1.4	
45	2.5	48.0	+0.8	16	4.89	47.5	±0.10	1.4	
48	2.5	51.0	+0.8	16	5.24	50.5	±0.10	1.4	
50	2.5	53.0	+0.8	16	5.51	52.5	±0.10	1.4	
55	3.2	58.9	+0.8	20	9.77	58.2	±0.15	1.8	
60	3.2	63.9	+0.8	20	10.76	63.2	±0.15	1.8	
65	3.2	68.9	+0.8	20	11.75	68.2	±0.15	1.8	
70	3.2	74.0	+1.0	25	12.44	73.2	±0.15	1.8	
75	3.2	79.0	+1.0	25	13.43	78.2	±0.15	1.8	
80	3.2	84.0	+1.0	25	14.42	83.2	±0.15	1.8	
85	3.2	89.0	+1.0	25	15.41	88.2	±0.15	1.8	
90	3.2	94.0	+1.0	25	16.40	93.2	±0.15	1.8	
95	3.2	99.0	+1.0	25	17.39	98.2	±0.15	1.8	
100	3.2	104.2	+1.2	32	17.98	103.2	±0.15	1.8	
105	3.2	109.2	+1.2	32	18.98	108.2	±0.15	1.8	
110	3.2	114.2	+1.2	32	19.97	113.2	±0.15	1.8	
115	3.2	119.2	+1.2	32	20.96	118.2	±0.15	1.8	
120	3.2	124.2	+1.2	32	21.95	123.2	±0.15	1.8	
125	3.2	129.2	+1.2	32	22.94	128.2	±0.15	1.8	

