



DIN7436 ISO13337

スプリングピン標準型

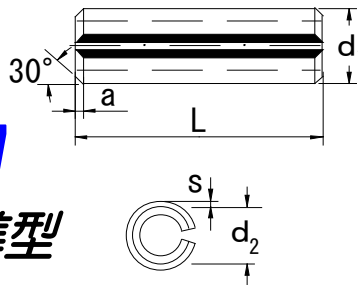

公称直径8φ未満

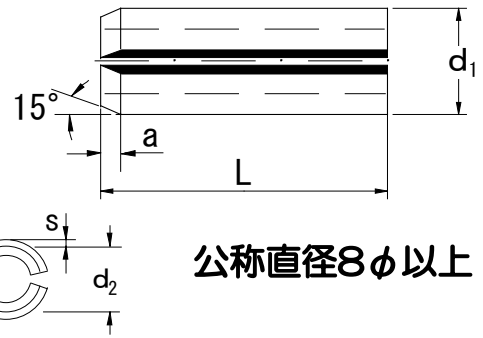

公称直径8φ以上

公称直径(mm)		2	2.5	3	3.5	4	4.5	5	6	8	10
面取り a	最大max.(mm)	0.4	0.45	0.45	0.5	0.7	0.7	0.7	0.9	1.8	2.4
	最小min.(mm)	0.2	0.25	0.25	0.3	0.5	0.5	0.5	0.7	1.5	2.0
挿入前 d ₁	最大max.(mm)	2.4	2.9	3.5	4.0	4.6	5.1	5.6	6.7	8.8	10.8
	最小min.(mm)	2.3	2.8	3.3	3.9	4.4	4.9	5.4	6.4	8.5	10.5
	d ₂ ≒	1.9	2.3	2.7	3.1	3.4	0.8	4.4	4.9	7.0	8.5
板厚s(mm)		0.2	0.25	0.3	0.35	0.5	0.5	0.5	0.75	0.75	1.0
剪断力	片持 (kN)	0.75	1.2	1.75	2.3	4.0	4.4	5.2	9.0	12	20
	両持(kN)	1.5	2.4	3.5	4.6	8.0	8.8	10.4	18	24	40
公差	長さL(mm)	重量 Weight (7.85kg/dm ³) kg/per1000≒									
±0.25	4	0.034	0.054	0.078	0.106	0.168	0.193				
	5	0.043	0.067	0.097	0.132	0.21	0.241	0.271			
	6	0.051	0.08	0.116	0.159	0.252	0.289	0.325			
	8	0.068	0.107	0.155	0.212	0.336	0.385	0.433			
	10	0.085	0.134	0.193	0.264	0.42	0.481	0.541	0.93	1.30	2.14
±0.5	12	0.102	0.161	0.232	0.317	0.504	0.578	0.65	1.12	1.55	2.57
	14	0.119	0.187	0.271	0.37	0.588	0.674	0.758	1.3	1.81	3.00
	16	0.136	0.214	0.309	0.423	0.672	0.77	0.866	1.49	2.07	3.43
	18	0.153	0.241	0.348	0.476	0.756	0.866	0.974	1.67	2.33	3.86
	20	0.17	0.267	0.386	0.528	0.84	0.962	1.08	1.86	2.59	4.29
	22	0.187	0.294	0.425	0.581	0.924	1.06	1.19	2.05	2.85	4.72
	24	0.204	0.321	0.464	0.634	1.01	1.16	1.3	2.23	3.11	5.14
	26	0.221	0.347	0.502	0.687	1.09	1.25	1.41	2.42	3.37	5.57
	28	0.238	0.374	0.541	0.74	1.18	1.35	1.52	2.6	3.63	6.00
	30	0.255	0.4	0.579	0.792	1.26	1.44	1.62	2.79	3.88	6.43
	32			0.618	0.845	1.34	1.54	1.73	2.98	4.14	6.86
	36			0.695	0.951	1.51	1.73	1.95	3.49	4.66	7.72
	40			0.772	1.06	1.68	1.92	2.16	3.72	5.18	8.57
	45					1.89	2.16	2.44	4.18	5.83	9.64
	50					2.1	2.4	2.7	4.65	6.48	10.7
±0.75	55							2.98	5.12	7.12	11.8
	60							3.25	5.58	7.77	12.9
	65							3.79	6.04	8.42	13.9
	70							4.06	6.51	9.06	15.0
	75							4.33	6.98	9.71	16.1
	80								7.44	10.4	17.1
	85								7.9	11.0	18.2
	90								8.37	11.7	19.3
	95								8.84	12.3	2.04
	100								9.3	13.0	21.4
	120									15.5	25.7
	140										30.0
160										34.3	
180											
200											

硬度 Hardness : HV 420~560

材質:バネ鋼/高炭素鋼

*仕様、寸法は予告なく変更する場合がございます