
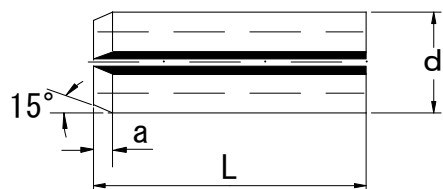




軽荷重型(Light Duty)

スプリングピン
Spring Pin公称直径8φ未満
nominal diameter up to 8mm公称直径8φ以上
nominal diameter above 8mm

公称直径(mm)	Nominal diameter	2	2.5	3	3.5	4	4.5	5	6	8	10
面取り a Chamfer	最大max.(mm)	0.4	0.45	0.45	0.5	0.7	0.7	0.7	0.9	1.8	2.4
	最小min.(mm)	0.2	0.25	0.25	0.3	0.5	0.5	0.5	0.7	1.5	2.0
挿入前 d1 Before installation	最大max.(mm)	2.4	2.9	3.5	4.0	4.6	5.1	5.6	6.7	8.8	10.8
	最小min.(mm)	2.3	2.8	3.3	3.9	4.4	4.9	5.4	6.4	8.5	10.5
	d2 ≒	1.9	2.3	2.7	3.1	3.4	0.8	4.4	4.9	7.0	8.5
板厚 (mm)	s	0.2	0.25	0.3	0.35	0.5	0.5	0.5	0.75	0.75	1.0
剪断力 Shear force	片持 Single (kN)	0.75	1.2	1.75	2.3	4.0	4.4	5.2	9.0	12	20
	両持 Double(kN)	1.5	2.4	3.5	4.6	8.0	8.8	10.4	18	24	40
公差 tolerance	重量 Weight (7.85kg/dm³) kg/per1000≒										
±0.25	4	0.034	0.054	0.078	0.106	0.168	0.193				
	5	0.043	0.067	0.097	0.132	0.21	0.241	0.271			
	6	0.051	0.08	0.116	0.159	0.252	0.289	0.325			
	8	0.068	0.107	0.155	0.212	0.336	0.385	0.433			
	10	0.085	0.134	0.193	0.264	0.42	0.481	0.541	0.93	1.30	2.14
±0.5	12	0.102	0.161	0.232	0.317	0.504	0.578	0.65	1.12	1.55	2.57
	14	0.119	0.187	0.271	0.37	0.588	0.674	0.758	1.3	1.81	3.00
	16	0.136	0.214	0.309	0.423	0.672	0.77	0.866	1.49	2.07	3.43
	18	0.153	0.241	0.348	0.476	0.756	0.866	0.974	1.67	2.33	3.86
	20	0.17	0.267	0.386	0.528	0.84	0.962	1.08	1.86	2.59	4.29
	22	0.187	0.294	0.425	0.581	0.924	1.06	1.19	2.05	2.85	4.72
	24	0.204	0.321	0.464	0.634	1.01	1.16	1.3	2.23	3.11	5.14
	26	0.221	0.347	0.502	0.687	1.09	1.25	1.41	2.42	3.37	5.57
	28	0.238	0.374	0.541	0.74	1.18	1.35	1.52	2.6	3.63	6.00
	30	0.255	0.4	0.579	0.792	1.26	1.44	1.62	2.79	3.88	6.43
	32			0.618	0.845	1.34	1.54	1.73	2.98	4.14	6.86
	36			0.695	0.951	1.51	1.73	1.95	3.49	4.66	7.72
	40			0.772	1.06	1.68	1.92	2.16	3.72	5.18	8.57
	45					1.89	2.16	2.44	4.18	5.83	9.64
±0.75	50					2.1	2.4	2.7	4.65	6.48	10.7
	55							2.98	5.12	7.12	11.8
	60							3.25	5.58	7.77	12.9
	65							3.79	6.04	8.42	13.9
	70							4.06	6.51	9.06	15.0
	75							4.33	6.98	9.71	16.1
	80								7.44	10.4	17.1
	85								7.9	11.0	18.2
	90								8.37	11.7	19.3
	95								8.84	12.3	2.04
	100								9.3	13.0	21.4
	120									15.5	25.7
	140										30.0
	160										34.3
	180										
	200										

硬度 Hardness : HV 420~560

材質: バネ鋼/高炭素鋼

Material: Spring Steel/High Carbon Steel

* 仕様、寸法は予告なく変更する場合がございます

* Subject to change without notice